

AT6101, AT6101B Spectrometers

Portable Radionuclide Identification Devices with external detection unit



Applications

- Monitoring of environment
- Radioactive waste control
- Radioactive sources and materials traffic control
- Scrap metal radiation monitoring on factories
- Nuclear industry
- Geological survey
- Nuclear medicine
- Research activities
- Emergency situations

AT6101 and AT6101B Portable multifunction scintillation gamma spectrometers can be used in laboratories as well as for working in field conditions. Main spectrometer function is radionuclide identification (natural, medical, industrial) without connection to a PC. Additional functionality: search and detection of radioactivity sources and dose rate measurement.

Operating principle

Spectrometers are composed of an external spectrometric gamma radiation detection unit and a processing unit.

Highly-sensible scintillation NaI(Tl) detectors are used for measurement of gamma radiation energy distribution, ambient gamma radiation dose rate equivalent, search and identification of radionuclides. Geiger-Muller counter tube, integrated into the processing unit, is used to extend the range of ambient gamma radiation dose rate measurement as well as to monitor radiation level around the operator.

External detection units can be connected to the spectrometer to measure alpha and beta particles flux density of contaminated surfaces.

Features

- Smart probes
- Spectrometric dose rate measurement method with "Spectrum-Dose" transformation operator
- Gamma radiation dose rate measurement and alpha and beta radiation flux density measurement with automatic background subtraction
- Automatic continuous LED stabilisation of the spectrometer energy scale
- Spectrometric path temperature compensation by integrated temperature probe
- Sound and LED alarm
- Recording and storing in memory up to 300 spectra

BDKG-05
(AT6101)



γ

BDKG-11
(AT6101B)




γ

Processing
Unit



γ

BDPA-01
BDPB-01



α, β



ATOMTEX[®]

INSTRUMENTS AND TECHNOLOGIES FOR NUCLEAR
MEASUREMENTS AND RADIATION MONITORING

AT6101, AT6101B Spectrometers

Specification

Detector AT6101 (BDKG-05) AT6101B (BDKG-11) Processing unit	Scintillator, NaI(Tl) Ø40x40 mm Scintillator, NaI(Tl) Ø63x63 mm Geiger-Muller counter tube
Gamma radiation energy range	20 keV...3 MeV
Radionuclide identification	Industrial Natural Medical
<u>Individual order:</u>	Library of identified radionuclides can be corrected
Typical resolution at 662 keV (¹³⁷ Cs)	7.5% (BDKG-05) 8% (BDKG-11)
Maximum input statistical load	≥5·10 ⁴ s ⁻¹
Integral nonlinearity	±1% max.
Detection time of ¹³⁷ Cs source with 50 Bq activity at a distance of 20 cm	<2 s
Sensitivity to gamma radiation	
²⁴¹ Am	BDKG-05 6000 cps/μSv·h ⁻¹ BDKG-11 13500 cps/μSv·h ⁻¹
¹³⁷ Cs	BDKG-05 760 cps/μSv·h ⁻¹ BDKG-11 2200 cps/μSv·h ⁻¹
⁶⁰ Co	BDKG-05 400 cps/μSv·h ⁻¹ BDKG-11 1200 cps/μSv·h ⁻¹
Response time for dose rate change from 0.1 μSv/h to 1 μSv/h	<2 s (BDKG-05, BDKG-11) [accuracy error ≤±10%]
Measurement range of ambient radiation dose rate equivalent	0.01...300 μSv/h (BDKG-05) 0.01...100 μSv/h (BDKG-11) 1 μSv/h...10 mSv/h (Processing unit)
Energy dependence relative to 662 keV (¹³⁷ Cs)	
BDKG-05, BDKG-11	±20% (in 50 keV...3 MeV energy range)
Processing unit	-25%...+35% (in 60 keV...3 MeV energy range)
Flux density measurement range	
Alpha particles from the surface (BDPA-01)	0.5...1·10 ⁵ particle/(min·cm ²) (in 4...7 MeV energy range)
Beta particles from the surface (BDPB-01)	3...5·10 ⁵ particle/(min·cm ²) (in 155 keV...3.5 MeV energy range)
Intrinsic relative error of gamma radiation dose rate and flux density measurement	±20% max.
Number of ADC channels	512
Continuous run time	≥12 h
Measurement instability during continuous service	±5% max.
Operation mode setup time	≤1 min
Burn-up life	≥100 Sv
Protection class	IP54
Power supply	Internal battery


Design and specifications are subject to change without notice

Working temperature range	-20°C...+50°C
Relative humidity with air temperature ≤35°C without condensation	≤95%


Overall dimensions, weight	
BDKG-05	Ø62x320 mm, 1.2 kg
BDKG-11	Ø78x350 mm, 1.9 kg
BDPA-01	Ø85x200 mm, 0.5 kg
BDPB-01	Ø85x205 mm, 0.55 kg
Processing unit	110x230x38 mm, 0.8 kg

Capabilities


Gamma radiation dose rate measurement

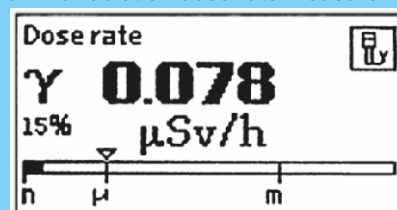

Detection and localization of gamma radiation sources

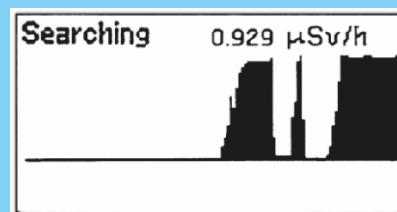

Spectrum displaying and processing

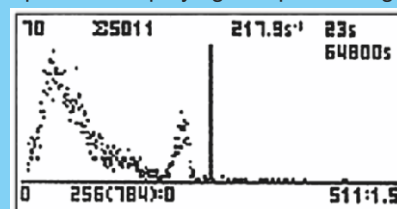

Radionuclide identification

Identification		15s	☐
Dose rate		1.26 μSv/h	
PAGE: 1:1			
Co-60	Industrial		
Cs-137	Industrial		

AT6101, AT6101B Spectrometers meet

Safety standard requirements:

IEC 61010-1:1990

EMC requirements:

EN 55011:2009

IEC 61000-4-2:2008

IEC 61000-4-3:2008

IEC 61000-4-6:2008

AT6101, AT6101B Spectrometers have the pattern approval certificates of Republic of Belarus, Russian Federation, Ukraine and Kazakhstan.



ATOMTEX®

<http://www.atomtex.com>

5, Gikalo st., 220005 Minsk,
Republic of Belarus

Tel./fax: +375 17 2928142

E-mail: info@atomtex.com



Corporate Member
of European
Nuclear
Society